


# DIN 2510 L/NF

Svorni vijak sa reduciranim  
tijelom i dvije matice

*Double end studs with reduced  
shank with 2 hexagon nuts*

Schraubenbolzen mit Dehnschaft und  
2 Sechskantmuttern

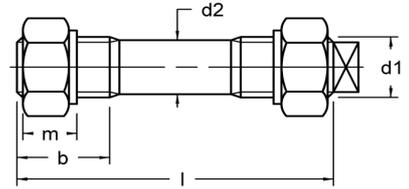

## Ck35+Ck35 Fe

P	1,75	2	2,5	3	3	3,5
d2	8,5	12	15	18	20,5	23
b	20	23	28	32	35	39
m	12	16	20	24	27	30
s	22	27	32	36	41	46
l/d1	M 12	M 16	M 20	M 24	M 27	M 30
65	1					
70	1					
75	1	1				
80		1				
85		1				
90		1				
95		1				
100		1	1			
110			1	1		
120			1	1		
130			1	1	1	
140			1	1	1	
150				1	1	
160					1	1
180						1

## 24CrMo5+Ck35 Fe

P	1,75	2	2,5	3	3	3,5
d2	8,5	12	15	18	20,5	23
b	20	23	28	32	35	39
m	12	16	20	24	27	30
s	22	27	32	36	41	46
l/d1	M 12	M 16	M 20	M 24	M 27	M 30
65	1					
70	1					
75	1	1				
80		1				
85		1				
90		1				
95		1				
100		1	1			
110			1	1		
120			1	1		
130			1	1	1	
140			1	1	1	
150				1	1	
160					1	1
180						1

## 21 CrMoV57+24CrMo5 Fe

P	1,75	2	2,5	3	3	3,5
d2	8,5	12	15	18	20,5	23
b	20	23	28	32	35	39
m	12	16	20	24	27	30
s	22	27	32	36	41	46
l/d1	M 12	M 16	M 20	M 24	M 27	M 30
65	1					
70	1					
75	1	1				
80		1				
85		1				
90		1				
95		1				
100		1	1			
110			1	1		
120			1	1		
130			1	1	1	
140			1	1	1	
150				1	1	
160					1	1
180						1

## A2

P	1,75	2	2,5	3	3	3,5
d2	8,5	12	15	18	20,5	23
b	20	23	28	32	35	39
m	12	16	20	24	27	30
s	22	27	32	36	41	46
l/d1	M 12	M 16	M 20	M 24	M 27	M 30
65	1					
70	1					
75	1	1				
80		1				
85		1				
90		1				
95		1				
100		1	1			
110			1	1		
120			1	1		
130			1	1	1	
140			1	1	1	
150				1	1	
160					1	1
180						1